


| No. | Cable Length(L) | Length Tolerance(L) |
|-----|---------------------|---------------------|
| 1 | $L < 1m$ | $\pm 50mm$ |
| 2 | $1 \leq L \leq 10m$ | $\pm 100mm$ |
| 3 | $10 < L \leq 30m$ | $\pm 150mm$ |
| 4 | $30 < L < 50m$ | $\pm 200mm$ |
| 5 | $L \geq 50m$ | $\pm 300mm$ |



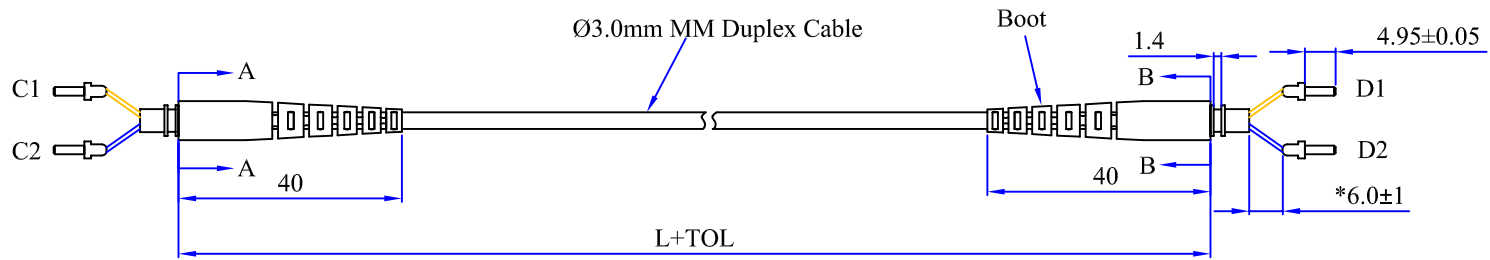


Technical requirement:


1. Performance index:

$IL \leq 0.2dB$,


2. No dust cap showing on the drawing.

| Title | | | |
|----------------|----------|--|--|
| AOC Patch cord | | | |
| Drawing | Steven | Item No | |
| Check | Henry | Drawing No: | |
| Approval | Williams |    曦和光电科技有限公司 XH Opto Tech Co.,LTD | |
| Date | 2018 | Page: 1-1 | |


| No. | Cable Length(L) | Length Tolerance(L) |
|-----|---------------------|---------------------|
| 1 | $L < 1m$ | $\pm 50mm$ |
| 2 | $1 \leq L \leq 10m$ | $\pm 100mm$ |
| 3 | $10 < L \leq 30m$ | $\pm 150mm$ |
| 4 | $30 < L < 50m$ | $\pm 200mm$ |
| 5 | $L \geq 50m$ | $\pm 300mm$ |

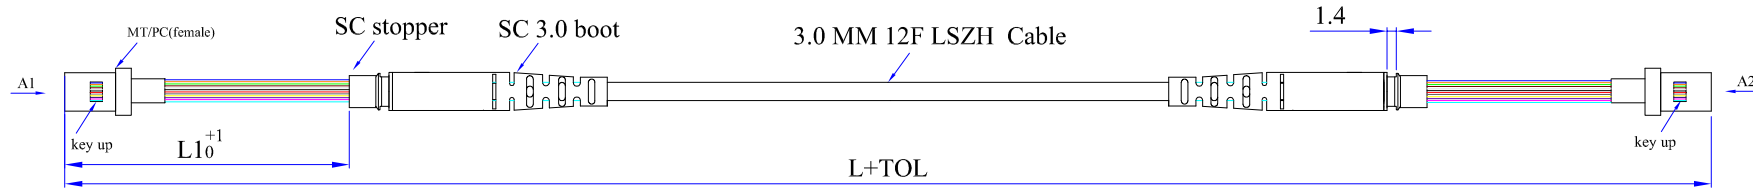

Polarity B (cross)



| WIRING | | |
|--------|--------|----|
| A1 | | A2 |
| 1 | blue | 12 |
| 2 | orange | 11 |
| 3 | green | 10 |
| 4 | brown | 9 |
| 5 | gray | 8 |
| 6 | white | 7 |
| 7 | red | 6 |
| 8 | black | 5 |
| 9 | yellow | 4 |
| 10 | violet | 3 |
| 11 | pink | 2 |
| 12 | aqua | 1 |



Note: No.1~12 just represent the hole of the position.

Technical requirement:

- Performance index:
 $IL \leq 0.5dB$,
- No dust cap showing on the drawing.

| | | | | | | | |
|----------|----------|-------------|--|------------------------------------|--|--|--|
| Title | | | | AOC Patch cord | | | |
| Drawing | Steven | Item No | | | | | |
| Check | Henry | Drawing No: | | | | | |
| Approval | Williams | | | 曦和光电科技有限公司 XH Opto Tech Co.,LTd | | | |
| Date | 2018 | Page: 1-1 | | | | | |