

DIN Adapter

DIN Simplex Adapter

Description

DIN Adapter featured a single unit body with spring-loaded free floating zirconia ferrule, makes its compact and reliable

Feature

- High precision of mechanical dimensions
- High reliability & stability
- Ceramic or Bronze Sleeve
- All parts compliant with ROHS
- Compliant with Telcordia and IEC




Application

- Telecom network
- Ethernet network
- Optical communication equipment
- Local Area Networks(LANs)
- Data processing networks


Specification:

Items	Insertion Loss	Mechanical resistance	Repeatability	Operating Temperature
SM/PC	≤0.2dB	200-600g	<0.2dB(500times)	-40℃~+85℃
SM/APC	≤0.2dB	200-600g	<0.2dB(500times)	-40℃~+85℃
MM/PC	≤0.2dB	200-600g	<0.2dB(500times)	-40℃~+85℃

A B C D E F G H

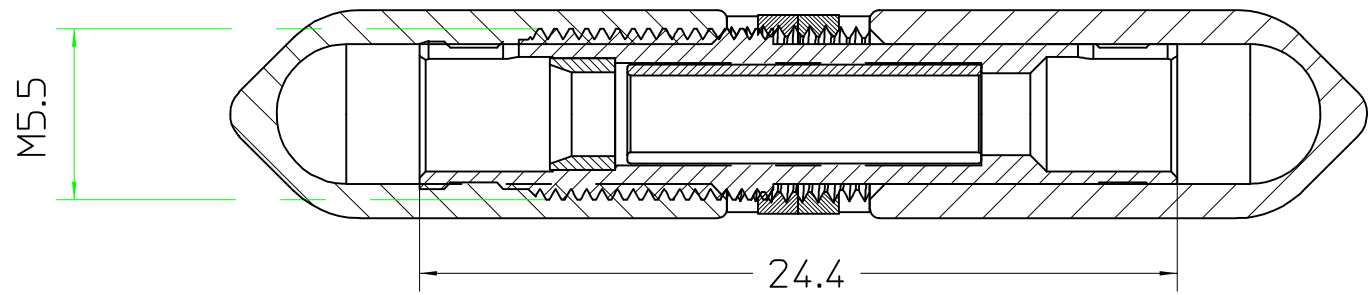


Section A-A

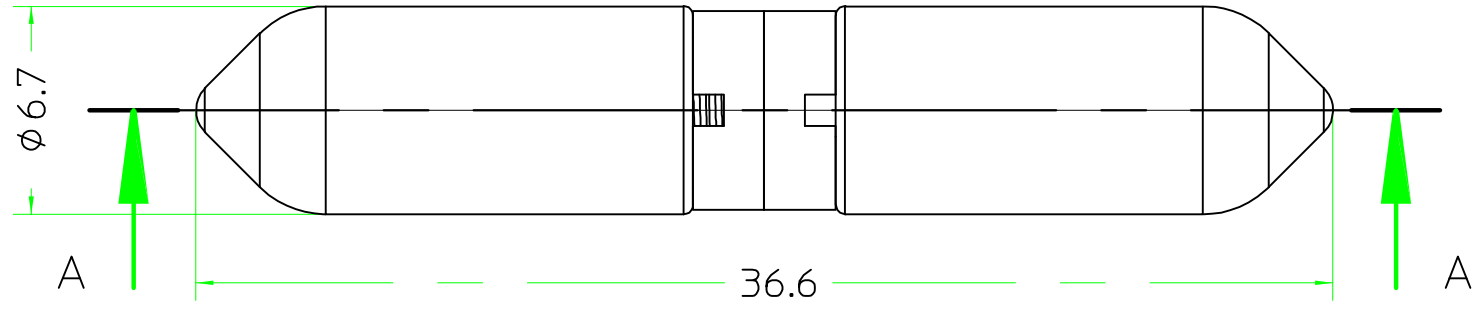

Technical Requirements:

1.The dimensions showing on the drawing are just for reference.

Title	DIN Adapter		
Drawing	Steven	Item No	
Check	Henry	Drawing No:	
Approval	Williams	⊙ □	 曦和光电科技有限公司 XH Opto Tech Co.,Ltd
Date	2018	Page: 1-1	

1
2
3
4
5
6